




**A**  
1  
METAL SIDING  
WALL SECTION  
SCALE: 3/4" = 1'-0"

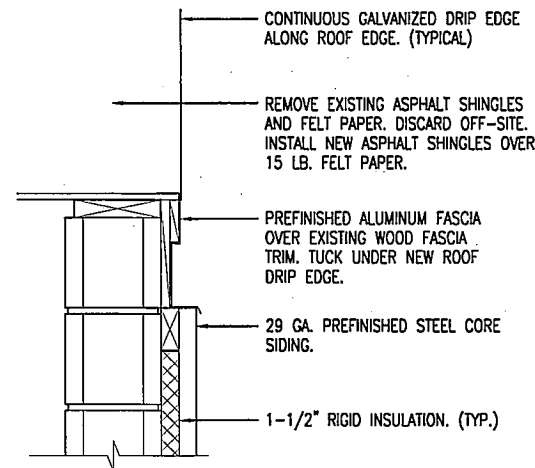


**D**  
1  
GABLE END WALL  
SCALE: 3/4" = 1'-0"

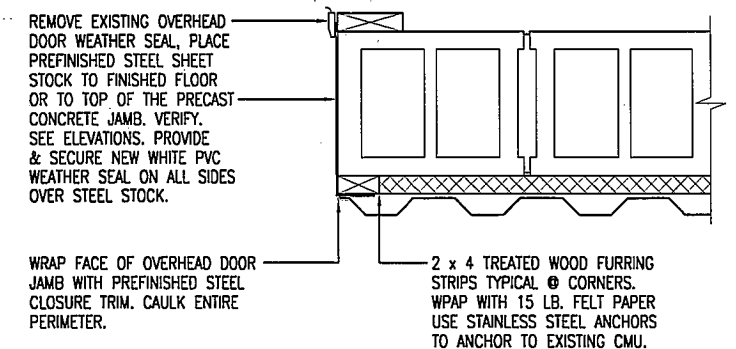

**E**  
1  
OVERHEAD DOOR JAMB  
SCALE: 3/4" = 1'-0"

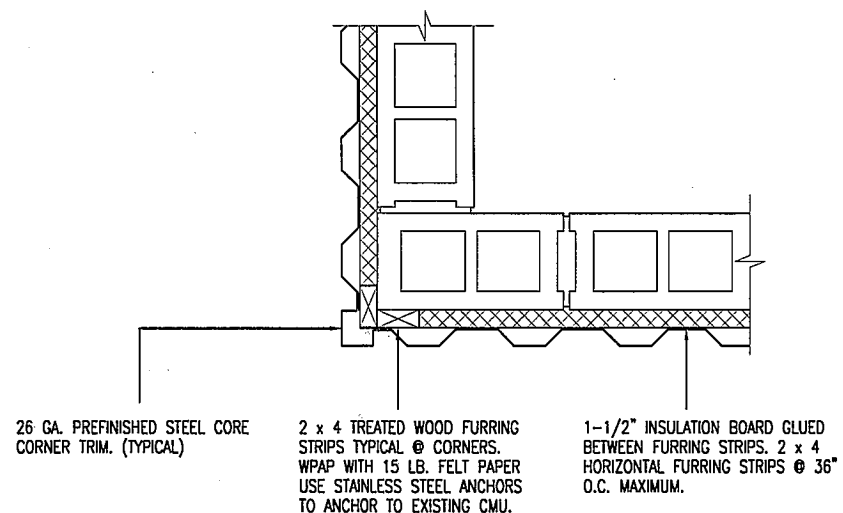

**B**  
1  
CORNER PLAN VIEW  
SCALE: 3/4" = 1'-0"

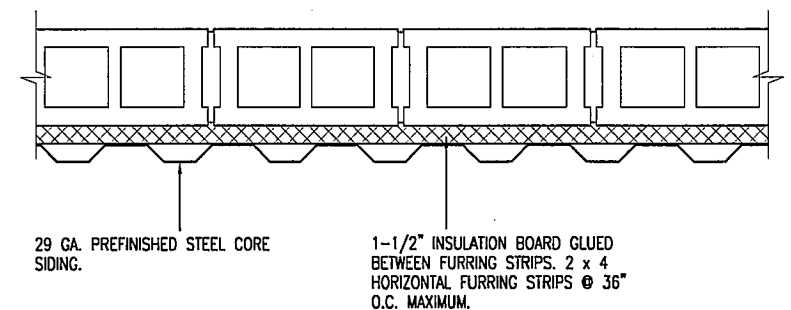

**C**  
1  
WALL PLAN VIEW  
SCALE: 3/4" = 1'-0"

# METAL SIDING DETAILS


MISSOURI DEPARTMENT  
OF TRANSPORTATION  
DIVISION OF GENERAL SERVICES  
FACILITIES MANAGEMENT

NEW SIDING OF MAINTENANCE  
BUILDINGS - VARIOUS SITES  
DISTRICT #10, SOUTHEASTERN MISSOURI

DRAWN BY: LARRY CARVER  
DATE: 8-25-06  
Sheet  
1 of 2

GENERAL NOTES

- CONTRACTOR TO PROVIDE SUFFICIENT BLOCKING AS DETERMINED BY MODOT FIELD REPRESENTATIVE FOR LIGHTING FIXTURES, CONDUITS, METERS, SATELLITE DISHES, ETC. THESE FIXTURES WILL BE REMOVED BY THE CONTRACTOR AND REATTACHED BY THE CONTRACTOR.
- SIDING COLOR AS SELECTED FROM MANUFACTURER'S STANDARD COLOR CHART BY THE MODOT FIELD REPRESENTATIVE.
- ALL DEBRIS TO BE REMOVED OFF-SITE.
- WHEN INSTALLING THE NEW METAL EXTERIOR WINDOW SILLS AND JAMB TRIM, THE CONTRACTOR IS TO REMOVE ALL OLD CAULK, INSTALL TRIM AND RECAULK. COLOR TO MATCH TRIM COLOR.
- PROVIDE FASCIA TRIM AS REQUIRED AT ALL MAN DOOR PORCHES.
- NEW DOWNSPOUT MINIMUM SIZE TO MATCH EXISTING SIZE REMOVED. PROVIDE ADAPTERS WHERE REQUIRED INTO EXISTING STORM SEWER.
- PROVIDE CONTINUOUS DRIP EDGE AT ALL DOOR AND WINDOW HEADS AND ABOVE HVAC UNITS AND EXHAUST FANS.
- CONTRACTOR RESPONSIBLE TO REPAIR LAWN AREA WITH TOPSOIL, SEED AND STRAW IF DAMAGED DURING CONSTRUCTION.

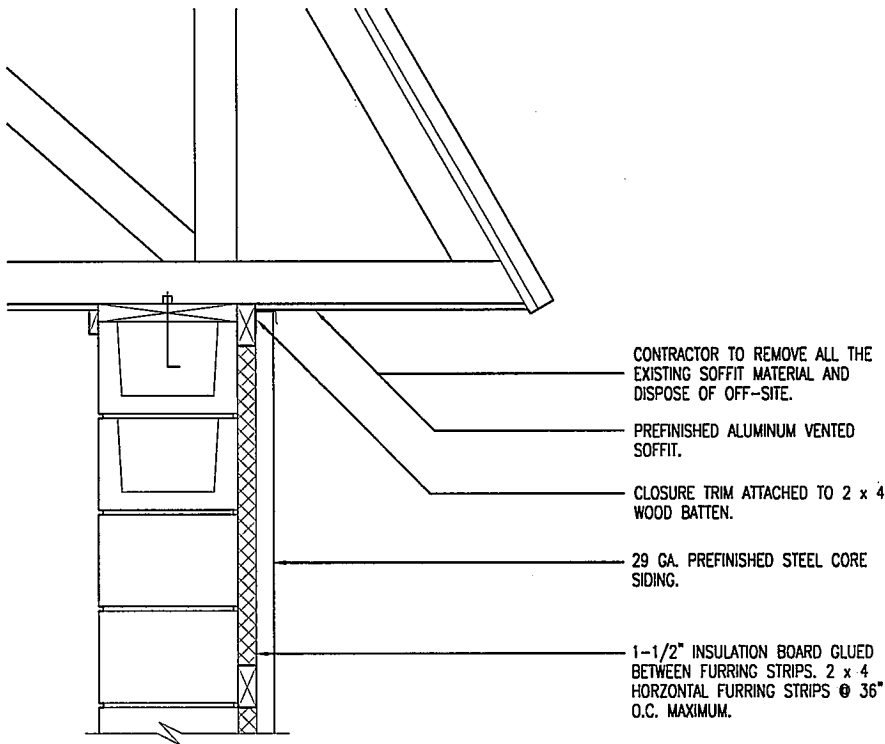

A WALL SECTION  
2 SCALE: 3/4" = 1'-0"

DETAILS & GENERAL NOTES

MISSOURI DEPARTMENT  
OF TRANSPORTATION  
DIVISION OF GENERAL SERVICES  
FACILITIES MANAGEMENT

NEW SIDING OF MAINTENANCE  
BUILDINGS - VARIOUS SITES  
DISTRICT #10, SOUTHEASTERN MISSOURI

DRAWN BY: LARRY CARVER  
DATE: 8-25-06  
Sheet  
2 of 2